

ASTARO SECURITY GATEWAY 110/120

DATASHEET



Internet Security for Small Businesses


Astaro™ Security Gateway Hardware Appliances provide complete, cost-effective protection against the endless amount of viruses, spam and hackers that threaten to compromise network security today.

The Astaro Security Gateway 110/120 is designed to provide complete, but easy-to-use protection for small businesses, branch and remote offices. Its compact size and economical price make it a perfect fit for any small office environment.

Live Demo

No download, registration or installation required - just click and test:

www.astaro.com/en/demo

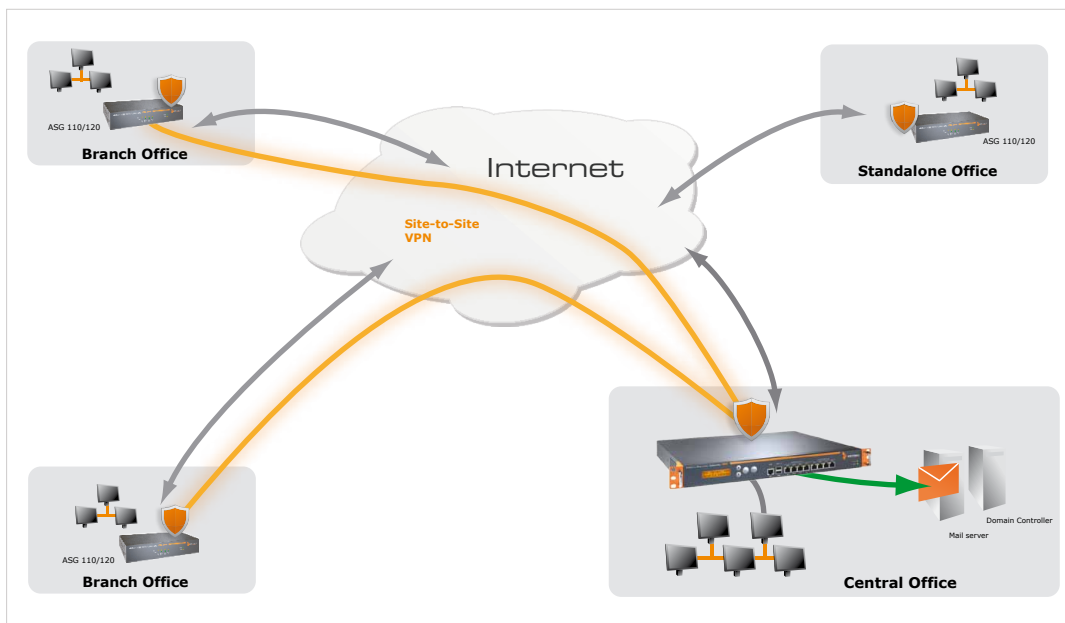

Benefits

- Comprehensive enterprise-class security even for smallest businesses
- Intuitive web-based GUI for complete and easy system management
- End-User self servicing portal frees administrator from daily spam and vpn management tasks
- Automatic system updates make manual software downloads unnecessary

Simple

Easy Management

All system settings can be managed via a web-based GUI. There's no need for using a CLI or 3rd party software.

Extensive Reporting

Detailed graphical reports give an insight into the system status, detected malware and accessed resources.

Secure

Clean Internet Access

Sophisticated network, mail and web filters protect users and servers and control IM/P2P and web usage.

Protected Data

State-of-the-art encryption protects data transferred between offices and mobile workers or via E-Mail.

Flexible

Complete UTM Security

Offers the same enterprise-class security features as all Astaro Security Gateway appliances as an option

Flexible Deployment

Securely connects branch offices to your headquarter and completely protects small business locations.




Common Criteria
Certification



ICSA Labs
Certification



Technical Specifications

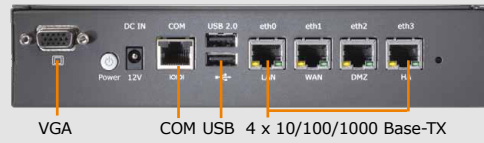

Appliance	ASG 110/120
Security Applications	
Essential Firewall	included
Network Security	optional subscription
Mail Security	optional subscription
Web Security	optional subscription
Web Application Security	optional subscription
Wireless Security	optional subscription
Capacity	
Maximum licensed Users	unrestricted (10*)
Maximum recommended Users (FW/UTM)	80/35 (10*/10*)
Firewall Throughput	1.8 Gbps
IPS Throughput	140 Mbps
VPN Throughput	125 Mbps
UTM Throughput	45 Mbps
RED Throughput	50 Mbps
E-mail Throughput (scanned/seen)	40,000 / 250,000 E-mails/h
Concurrent Connections	120,000
Hard drive for local Quarantine & Logs	160 GB
Physical Interfaces	
Ethernet Interfaces	4 x Gigabit Ethernet
I/O Ports	2 x USB, 1 x COM (RJ45), 1 x VGA
LED Display	Power, HDD, 4 x LAN
Power Supply	DC: 12V, AC: 100-240V, 50~60Hz, max. 1.6A
Physical Specifications	
Mounting	Desktop or Wall (Rackmount Kit Avail.)
Dimensions (W x H x D)	120 x 44 x 145 mm
Weight	1.15 kg/2.53 lbs
Power Consumption (Standby/Full)	7.15/35.96 Watts
Operating Temperature	5°C - 35°C (operating), 0°C - 70°C (storage)
Humidity	20% - 90%, (operating) 5%-95% (storage) non-condensing
Safety Regulations	
Certifications	CE, FCC Class B, CB, VCCI, C-Tick, UL

*ASG 110 is limited to 10 users

Contact

Visit us at www.astaro.com or contact the Astaro partner close to you.

Your Solution Partner

Symtrex Inc.
www.symtrex.com / www.astaro.ca
 416-769-3000 / 866-431-8972
sales@symtrex.com / sales@astaro.ca



www.astaro.com